

Electric bain marie top in AISI 304 stainless steel. 1.5mm thick stainless steel top without flue apertures, designed for insertion of water column accessory. Well in AISI 304 stainless steel with radiused internal corners to facilitate cleaning. Sloping well bottom for optimum drainage of water. Well dimensions: 515D x 350W x 170H mm (1 x GN 1/1).


Designed to accommodate 15 mm deep containers. Armored heating elements in Incoloy underneath the well. Water temperature thermostatically controlled, with adjustment from 30°C to 90°C. Safety thermostat trips in the event of activation of heating without water in the well, manual reset. Activation of heating signalled by an orange indicator led on the control panel. Appliance equipped with vertical overflow drain.

**STANDARD FEATURES**

- 1.5mm thick pressed stainless steel tops
- Modular design
- Interlocking device supplied with all units
- Appliance equipped with vertical overflow drain

**OPTIONAL FEATURES**

- Cabinet base and doors
- Hygienic cabinet base with pressed runners
- Refrigerated base
- 50mm stainless steel frame for worktop installed on refrigerated base or countertop

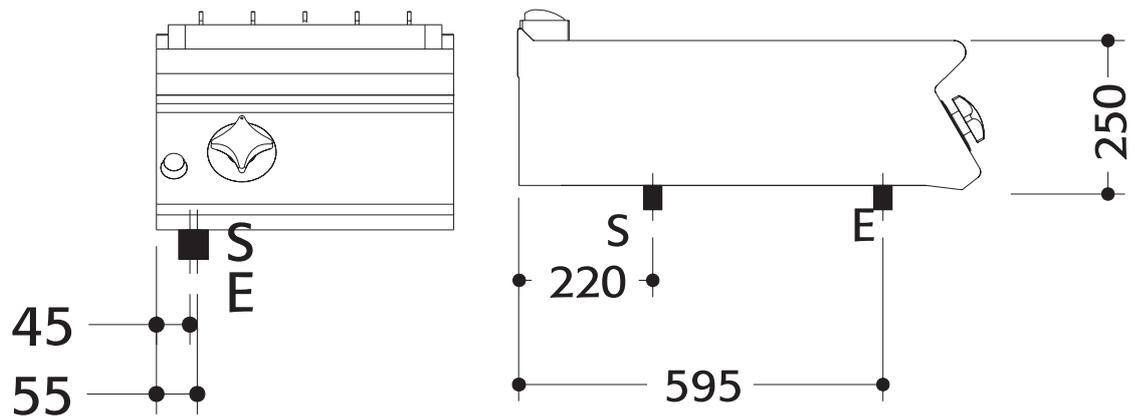

**LEGEND**

- S = Draining 1/2"
- E = Socket

**DIMENSIONS**

External: 730D x 400W x 250H mm

**TECHNICAL DATA**

Power Supply: 230V 3NAC 50Hz (Lead & Plug not included)

Total Output: 1.8kW

**SHIPPING DATA**

Net Weight: 17kg

Shipping Weight: 25kg

Shipping Dimensions: 440W x 830L x 550H mm

Tank Dimensions: 515D x 350W x 170H mm

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

